

## Twin 1.5 Gallon Thermal Coffee Brewing System


CBS-52H

CBS 5000  
S E R I E S  
TPD STYLE

# The Ultimate Coffee Machine.

Your Answer to Brewing The Best Tasting Coffee  
Consistently Day After Day...

Developed with proprietary designs and technologies, FETCO® equipment ensures safety and integrity of each brew with innovative designs such as:



- Dual Brew Basket Safety Locks Incorporated Into Start Switch



- Stainless Steel Gourmet Size Brew Baskets Designed For Heavier Brew Ratios

FETCO® Brewers Utilize The Most Recent Technological Advances In Coffee Brewing In Order To:

- Hold A Constant Water Temperature During 100% Of Brew Cycle
- Maintain Sprayover Volume Consistency
- Resist Lime Buildup Inside Dispense Tube System
- Utilize All Solid State Components



### The LUXUS® Thermal Dispenser

Totally portable, requires no electric power.

Once filled and capped, it goes anywhere...Ready to act as your remote dispensing station wherever needed.

You can prepare them ahead of time and place them where you want them. It is important to note that the LUXUS® thermal dispenser can be staff-operated or used as a self-service system



CBS-52H in Stainless Steel finish and with two 1.5 gallon TPD style LUXUS® Thermal Dispensers  
Dispensers are sold separately.

**FETCO®**  
CORPORATION

# CBS-52H

## Standard Features:

- Stainless Steel, Gourmet Size Coffee Brew Basket
- Brew Basket Double Safety Lock
- Open-Type, Leak-Free Dispense System
- Fully Automatic With Electronic Type Temperature Control
- Mercury Type Power Contactor
- Two-Level Tank Drain System
- Total Serviceability From The Front
- Hot Water Service

## Optional Features:

- Half Batch Brewing Capability
- Iced Tea Brewing Capability
- Color Stainless Steel Finish
- Custom & Export Voltage


## Accessories:

- 1.5 Gallon LUXUS™ Thermal Dispensers
- Drip Tray

## Shipping Dimensions:

- Set: 35" x 23" x 23"
- Shipping Weight: Total: 100 lbs

## Dimensions & Specifications

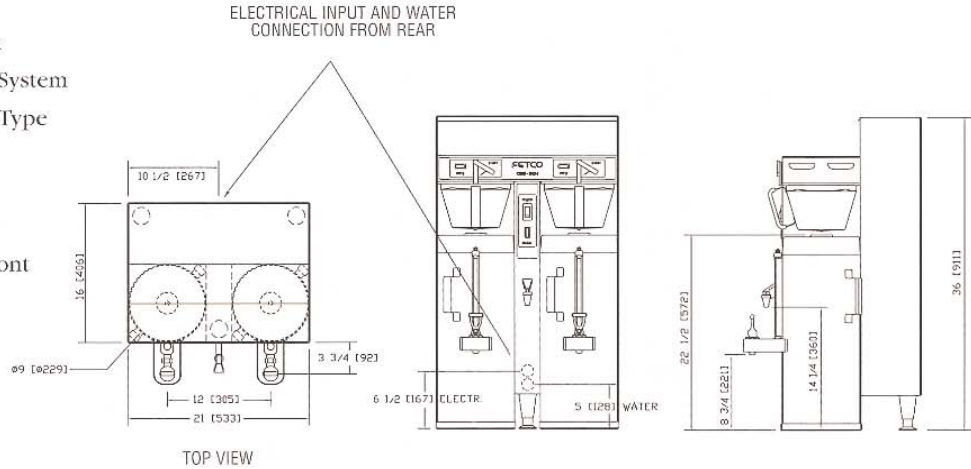

**Water Requirements:** 20-75 psig, 1.25 gpm flow rate. Water inlet is 3/8 Male Flare  
**Tank Capacity:** 7.6 gallons

## Standard Electrical Configurations & Brewing Efficiency

Electrical Config. Code	Heater Configuration	Voltage	Phase	Wires	KW	Maximum Amp draw	Brews per Hour	
							Cold Water	Hot Water
C52016	2 x 3000 watt	120/208 120/220 120/240	single	3 + ground	4.6	22.4	7.4	17.2
				3 + ground	5.2	23.7	8.6	19.9
				3 + ground	6.1	25.8	9.9	22.0
C52026	2 x 4000 watt	120/208 120/220 120/240	single	3 + ground	6.1	29.6	9.9	22.0
				3 + ground	6.8	31.3	11.5	22.0
				3 + ground	8.1	34.1	13.2	22.0
C52036	3 x 3000 watt	120/208 120/220 120/240	three	4 + ground	6.9	19.5	11.2	22.0
				4 + ground	7.7	20.6	12.9	22.0
				4 + ground	9.1	22.4	14.9	22.0
C52046	3 x 4000 watt	120/208 120/220 120/240	three	4 + ground	9.1	25.8	14.9	22.0
				4 + ground	10.3	27.3	17.3	22.0
				4 + ground	12.1	29.7	19.8	22.0
C52056	4 x 3000 watt	480	three	3 + ground	12.1	22.5	19.8	22.0
C52986		Max Steam Demand 40lbs./hr.; 10-15 PSI; 120 Volt; 2 + ground; .08 Amps; 1/2" Steam Line					22.0	22.0
C52996		Custom Export Voltage – Consult Factory						

This product is approved by one or more of the following marks:



## Patents & Approvals:

- U.S. Pat. Nos. 5,000,082; 5,331,885.
- Other patents pending.
- International patents apply.

FETCO® Corporation is a proud and active member of these organizations:



Food Equipment Technologies Company  
 640 Heathrow Drive, Lincolnshire, IL 60069 USA  
 Phone: 847.821.1177 800-FETCO 99 Fax: 847.821.1178  
 Internet: www.fetco.com E-mail: sales@fetco.com

FETCO & LUXUS are both trademarks or tradenames of Food Equipment Technologies Company. All other trademarks or tradenames are trademarks or tradenames of their respective owners.